




HONDA TRX450 FENDER FIX

Congratulations on purchasing your new TRX450 Fender Fix. This simple modification is designed to permanently attach the front wings of the rear fender securely to the chassis and eliminate the possibility that your boots will pull the wings out and interfere with your riding.

There are a couple simple modifications you need to make before you can install the hardware included with the kit.


1st

You will need to remove the rubber grommets from the Gas Tank Support Shield where the rear fender wings attach to it on both sides as shown here.

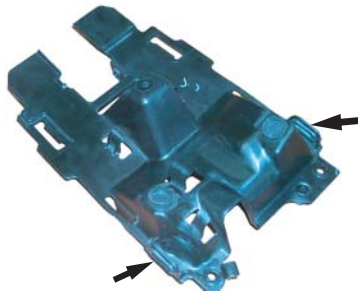

2nd


You will need to cut or grind the top edge of the plastic off so that the center of the clip is centered in the slot top to bottom as shown here. You only need to cut off about 1/16" of an inch, so be careful to not take off too much.

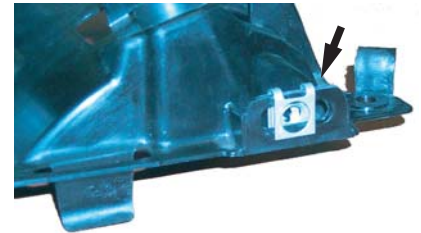

3rd

Install the clips using a screwdriver as shown here.

With screwdriver

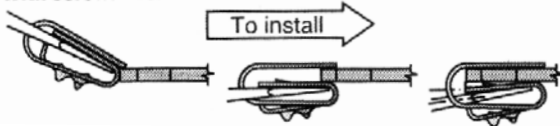


4th

Cut off the prongs that used to plug into the grommets on the wings of the rear fenders. Try to leave an outline of where the prongs were, so you can use them to mark where you need to drill a hole. Then drill a 1/4" hole into the center of where the prong was on both sides.

5th

Next, install the new stud into the hole in the rear fenders, and install the retainer as shown here.



6th

Now, install your rear fenders, and use a Phillips screwdriver to turn the stud 1/4" of a turn to securely hold the wings of the fenders to the chassis. Make sure you turn them far enough that they seat correctly into the clip.



REORDER INFORMATION:
STUD P/N: 21P40306C1
RETAINER P/N: 21P40306C2
CLIP ON RECEPICAL P/N: 21P40306C3